

FRONT

BACK

# HEX<sub>4</sub> BSM460M-72HBD

**166**

Bi-facial mono perc 440 w- 460 w  
Efficiency up to 21.2%

## Made In Thailand

 **Long Beach, CA Stock**

 **Best Commerical Selling (16W+Shipped)**

 **Same Day Shipping**

- Dimensions:2094\*1038\*30mm
- Weight:28kg
- Max. System Voltage: 1500 V (IEC/UL)

### PERFORMANCE WARRANTY

**15**  
Years

Enhanced Product Warranty on Materials and Workmanship\*

**30**  
Years

Linear Power Performance Warranty\*  
\*According to the applicable Bluesun Solar Limited Warranty Statement.

### GREAT PERFORMANCE AND RELIABILITY

- ★ Bi-facial Perc Half Cut Technology
- ★ Better Energy Yield
- ★ Power Degradation -0.45%/30 Years Linear Warranty
- ★ TUV SUD Anti PID Certificated
- ★ IP68 Junction Box/High Water Proof Level
- ★ Reduced Hot Spot Risk

### MANAGEMENT SYSTEM CERTIFICATES

- ISO 9001: 2015 Quality Management System
- ISO 14001: 2015 Environment Management System
- ISO 45001: 2018 Occupational Health and Safety Management Systems

### PRODUCT CERTIFICATES

- IEC 61215 / IEC 61730 / UL 61730



### BLUESUN SOLAR CO.,LTD

Add:1499 Zhenxing Road, Shushan District,230031 Hefei,China

Tel:+86 (158) 5821 3997

Fax:+86 (551) 6565 2651

E-mail:info@bluesunpv.com

Http://www.bluesunpv.com

US Warehouse Location: Long Beach, CA

\*Release BSM370M-60HPH(355-370W)\_V.22\_04

## ELECTRICAL PARAMETERS

### Performance at STC (Power Tolerance 0 ~ +3%)

Maximum Power (Pmax/W)	440	445	450	455	460
Operating Voltage (Vmpp/V)	41.6	41.8	42.0	42.2	42.4
Operating Current (Impp/A)	10.58	10.65	10.72	10.79	10.86
Open-Circuit Voltage (Voc/V)	50.0	50.2	50.4	50.6	50.8
Short-Circuit Current (Isc/A)	11.22	11.29	11.36	11.43	11.50
Module Efficiency ηm(%)	20.2	20.5	20.7	20.9	21.2

### Performance at NMOT

Maximum Power (Pmax/W)	327	330	334	337	341
Operating Voltage (Vmpp/V)	38.9	39.1	39.3	39.4	39.6
Operating Current (Impp/A)	8.41	8.47	8.52	8.57	8.62
Open-Circuit Voltage (Voc/V)	46.8	46.9	47.1	47.3	47.5
Short-Circuit Current (Isc/A)	9.04	9.10	9.16	9.21	9.27

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 NMOT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Air Mass AM1.5, Wind Speed 1m/s

### Electrical characteristics with different rear side power gain (refer to 440W front)

Pmax gain	Pmax/W	Vmpp/V	Impp/A	Voc/V	Isc/A
5%	462	41.6	11.11	50.0	11.78
10%	484	41.6	11.64	50.0	12.34
15%	506	41.6	12.17	50.0	12.90
20%	528	41.6	12.70	50.2	13.46
25%	550	41.6	13.23	50.2	14.03

## MECHANICAL SPECIFICATION

Cell Type	Monocrystalline
Cell Dimensions	166*166mm
Cell Arrangement	144 (6*24)
Weight	28kg (61.73lbs)
Module Dimensions	2094*1038*30mm (82.44*40.87*1.18inches)
Cable Length (Portrait)	Portrait 300mm/Landscape 1200mm/Customized
Cable Cross Section Size	TUV: 4mm <sup>2</sup> (0.006inches <sup>2</sup> )/UL: 12AWG
Front Glass	2.0mm (0.08 inches) AR Coating Semi-tempered Glass
Back Glass	2.0mm (0.08 inches) Glazed Semi-tempered Glass
No. of Bypass Diodes	3/6
Packing Configuration (1)	35pcs/carton, 770pcs/40hq
Packing Configuration (for USA)	36pcs/carton, 648pcs/40hq
Frame	Anodized Aluminium Alloy
Junction Box	IP68


## OPERATING CONDITIONS

Maximum System Voltage	1500V/DC(IEC)
Operating Temperature	-40°C ~ +85°C
Maximum Series Fuse	25A
Static Loading	Snow Loading: 5400Pa/ Wind Loading: 2400Pa
Conductivity at Ground	≤0.1Ω
Safety Class	II
Resistance	≥100MΩ
Connector	T01/LJQ-3-CSY/MC4/MC4-EVO2
Backside Output Ratio*	70% ± 5%
*Under STC: Backside Output Ratio = P <sub>max(rear)</sub> / P <sub>max(front)</sub>	


## TEMPERATURE COEFFICIENT

Temperature Coefficient Pmax	-0.36%/°C
Temperature Coefficient Voc	-0.26%/°C
Temperature Coefficient Isc	+0.043%/°C
NMOT	43±2°C

## I-V CURVE

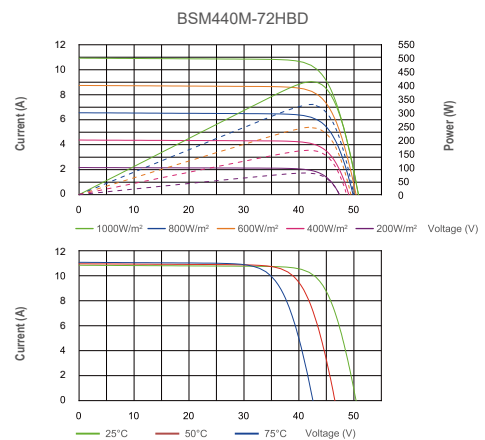

## TECHNICAL DRAWINGS

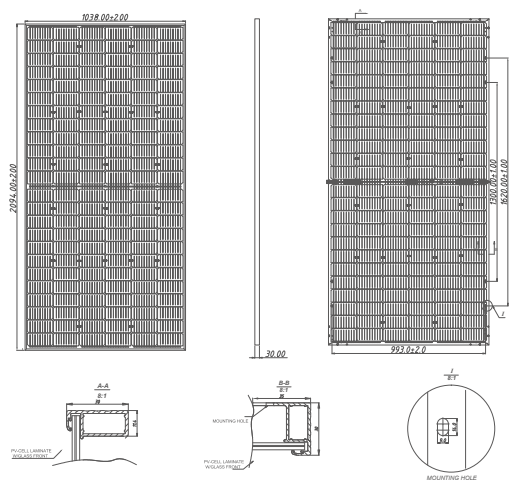

## BLUESUN SOLAR CO.,LTD

Add:1499 Zhenxing Road, Shushan District,230031 Hefei,China

Tel:+86 (158) 5821 3997  
E-mail:info@bluesunpv.com

Fax:+86 (551) 6565 2651  
Http://www.bluesunpv.com

US Warehouse Location: Long Beach, CA

\*Release BSM370M-60HPH(355-370W)\_V\_22\_04